



Part of Ant Group Ltd

## Bubbleshield Bag\_ANT016BSB


### STATIC Shielding Bubble Laminate (Mil B 81705)

The lamination of an ESD transparent static shielding bag film laminated to an anti-static polyethylene. Bubblewrap provides both physical and anti-static protection.

The outer layer is an ESD transparent static shielding film. This material forms a Faraday cage around the product, offering superior static shielding protection, while the inner layer of pink anti-static bubblewrap gives excellent physical protection. Both of these materials are qualified to Military Standard B 81705.

#### Features:

- Provides 'Faraday Cage' protection against ESD
- Conforms to MIL-PRF-81705D Type III, EIA 625, EIA 541, ANSI/ESD S-20.20
- Semi transparent finish
- Custom sizes and printing available on request
- This product is fully reusable, protecting both your product and the environment

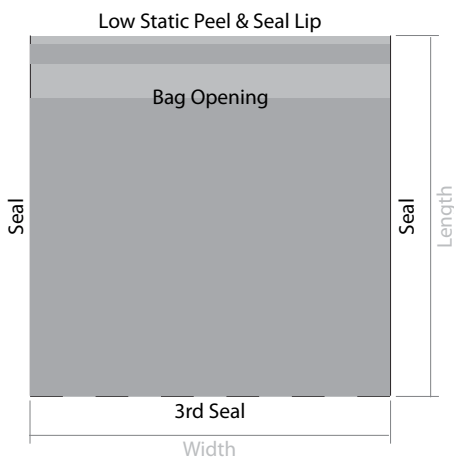

#### Configuration(s):

Our bags are available in custom sizes or in several industry standard sizes. Bags are offered heat sealed along the three edges and provided with a low static peel and seal lip.

Product Code:	Description:	Size (inches):	Size (mm):	Additional Notes:
016-0003	Bubbleshield Bag	4 x 6	102 x 152	Pack of 100
016-0025	Bubbleshield Bag	6 x 10	152 x 254	Pack of 100
016-0026	Bubbleshield Bag	8 x 10	203 x 254	Pack of 100
016-0027	Bubbleshield Bag	10 x 12	254 x 305	Pack of 100
016-0004	Bubbleshield Bag	12 x 14	305 x 355	Pack of 100
016-0006	Bubbleshield Bag	12 x 20	305 x 508	Pack of 100
016-0028	Bubbleshield Bag	14 x 18	406 x 457	Pack of 100
016-0034	Bubbleshield Bag	16 x 20	406 x 508	Pack of 100
016-0029	Bubbleshield Bag	18 x 18	457 x 457	Pack of 100



Part of Ant Group Ltd

## Bubbleshield Bag\_ANT016BSB



### Test Conditions:

The following results were taken under the following environmental test conditions:

Temperature: 22.3°C / Humidity: 47.5%

Technical Properties:	Test Standard:	Result:
Film Composition	N/A	PET-AL/PP
Film Thickness	Micron Meter	2.9mils-3.1mils
Puncture Strength	FTMS 101	14lbs
Seam Strength	MIL-PRF-81705D	Pass
Tensile Strength	ASTM D882	35lbs/inch width
Light Transmission	ASTM D1003	41%
Electrostatic Shielding	MIL-B-81705C	35dB
Interior Surface Resistivity	ASTM D257	10 <sup>10</sup> Ω
Exterior Surface Resistivity	ASTM D257	10 <sup>9</sup> Ω
Metalized Layer Resistivity	ASTM D257	8Ω
Static Decay	EIA-541	0.2secs
Remains Voltage	EIA-541	24V
Physiological clearance certificate of used raw material	Bgvv, EU, FDA	Yes

### Test Conclusion: (Date of Issue: 2009-05-12)

The anti-static bubbleshield bag is tested accordance with the relevant test standard and requirements.

Test Item:	Test Method:	Measured Equipment(s):	MDL:
Lead (Pb)	IEC 62321:2008 Ed.1 Sec.8	ICP-OES	2mg/kg
Cadmium (Cd)	IEC 62321:2008 Ed.1 Sec.8	ICP-OES	2mg/kg
Mercury (Hg)	IEC 62321:2008 Ed.1 Sec.7	ICP-OES	2mg/kg
Hexavalent Chromium (Cr(VI))	IEC 62321:2008 Ed.1 Annex C	UV-Vis	2mg/kg
Polybrominated Biphenyls (PBBs)	IEC 62321:2008 Ed.1 Annex A	GC-MS	5mg/kg
Polybrominated Diphenyl Ethers (PBDEs)	IEC 62321:2008 Ed.1 Annex A	GC-MS	5mg/kg